

| REV. | DESCRIPTION | DRAWN        | CHECKED | APPROVED     |
|------|-------------|--------------|---------|--------------|
| A    | NEW RELEASE | YCH 04/20/07 | ~       | LJC 04/20/07 |
| B    | 整理图面        | YCH 05/14/07 | ~       | LJC 05/14/07 |
| C    | 整理图面        | YCH 10/17/07 | ~       |              |



NOTES:

- Insulation material: PVC  
Color: Grey
- SPECIFICATION
  - Rating: 300V
  - Conductor Size: 28AWG or 30AWG.
  - Insulation resistance: 100MΩ/km min.
- APPLICATION
  - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.



4. Product Number Code

DS1057 - X X X X X

- X X X X X — Edge mark
- R: Red mark
- F: Flower mark
- Wire diameter
  - 1:  $\phi 0.100$  (30AWG)
  - 2:  $\phi 0.127$  (28AWG)
- Wire AWG
  - 28: 28AWG
  - 30: 30AWG
- Cable color
  - A: Gray
- No. Of positions
  - 10: 10pin
  - 64: 64pin

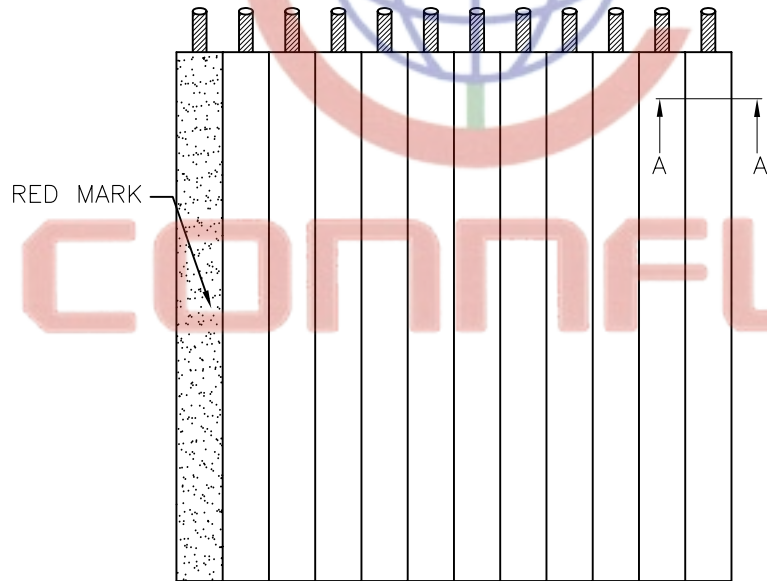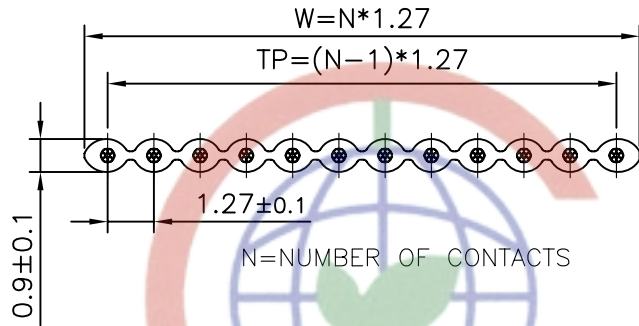

| Number | Dimensions |       |           | Max. conductor resistance<br>DC 20°C<br>Ω/m |
|--------|------------|-------|-----------|---|
|        | TP(mm)     | W(mm) | Tolerance |   |
| 10     | 11.43      | 12.70 | ±0.30     | ∅0.100<0.397                                |
| 14     | 16.51      | 17.78 | ±0.30     |   |
| 16     | 19.05      | 20.32 | ±0.30     |   |
| 20     | 24.13      | 25.40 | ±0.30     |   |
| 24     | 29.21      | 30.48 | ±0.30     |   |
| 26     | 31.75      | 33.02 | ±0.30     |   |
| 30     | 36.83      | 38.10 | ±0.30     |   |
| 34     | 41.91      | 43.18 | ±0.40     |   |
| 40     | 49.53      | 50.80 | ±0.40     |   |
| 50     | 62.23      | 63.50 | ±0.40     |   |
| 60     | 74.93      | 76.20 | ±0.40     |   |
| 64     | 80.01      | 81.28 | ±0.40     |   |

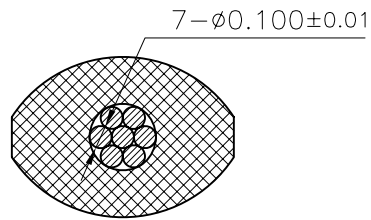

SECTION A-A (4:1)

SECTION A-A (4:1)

| GENERAL TOLERANCE |       | ANGLE TOLERANCE  |     | PROJECTION  | UNIT                 | TITLE |  |
|-------------------|-------|------------------|-----|---|----------------------|-------|--|
| X.                | ±0.60 | X.               | ±5° | mm  | 2651 GRAY FLAT CABLE |       |  |
| .X                | ±0.38 | .X               | ±3° | A4  | SERIES DS1057        |       |  |
| .XX               | ±0.25 | .XX              | ±2° |   |                      |       |  |
| DRAWING TYPE      |       | CUSTOMER         |     | 晨翔电子有限公司<br><b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b> |                      |       |  |
| SCALE             |       | SHEET            |     |   |                      |       |  |
| DRAWING NO.       |       | C-DS1057-XXXXX-C |     |   |                      |       |  |