



HSF

NOTES:

Current Rating:3.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PA6T+30%GF(UL94V-0)



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

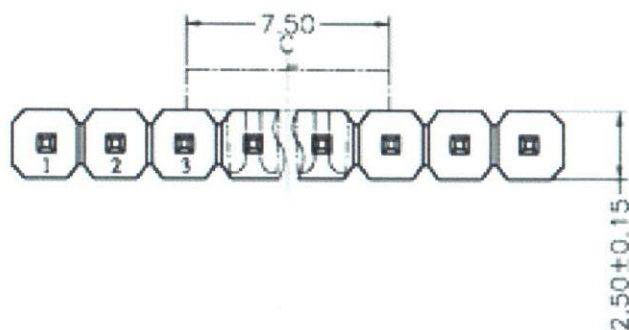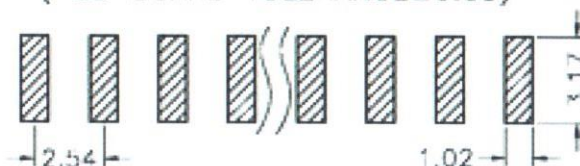

Ordering Information

12259 - XX XXCZXXX 0 1

No. of Pins per Row: 01-40	Contact Plating	Pin Length
	G0-Gold Flash	L=A+B+2.5±0.3
	G1-3u"Gold	
	G2-5u"Gold	
	G3-10u"Gold	
	G4-15u"Gold	
	G5-30u"Gold	
	S0-Gold Flash/Tin	
	S1-3u"Gold/Tin	
	S2-5u"Gold/Tin	
	S3-10u"Gold/Tin	
	S4-15u"Gold/Tin	
	S5-30u"Gold/Tin	
	S6-Tin	

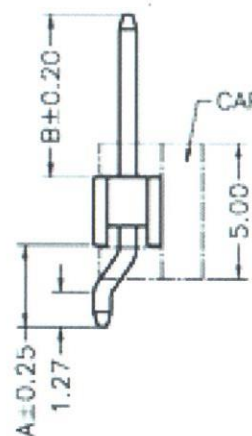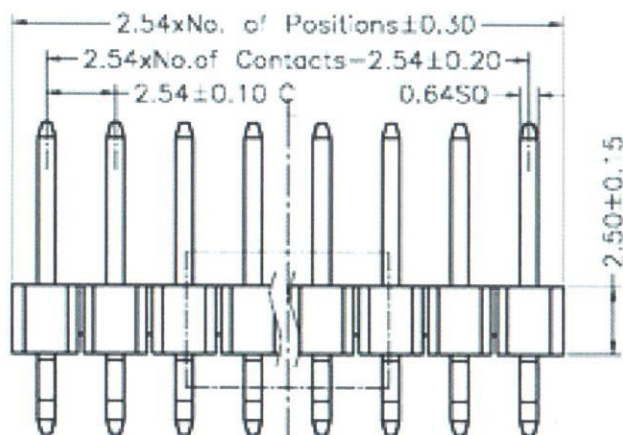

ITEM	A	B
Standard	3.00	6.00
Alternate		

					OPERATION	DRAW	WE:XD	08/03/17	SCALE	4:1	starfields		
					XX ±0.40	DES:GN			UNIT	mm		PART NO.	
					XXX ±0.25	CHECK			SIZE	A4		TITLE:	PH2.54 SINGLE ROW 90° SMT H=2.5
					XXX ±0.15	APPROVE			SHEET	1/1		Customer NO.	
AG	08/03/17				Angle				PROJ.				
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE								