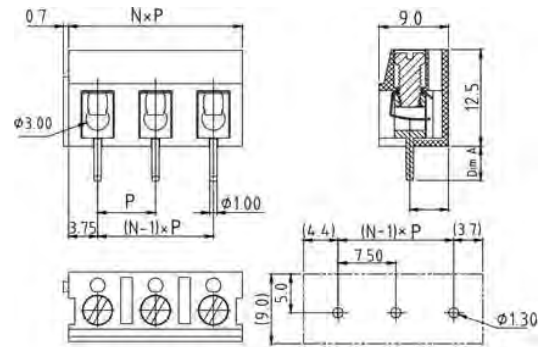


## PCB WIRE PROTECTOR TERMINAL BLOCKS

**ULO-TB37-300/7.5**
**Pitch: 7.5mm**

*N: Number of poles*

Standard	UL	TUV
Rated voltage	300V	450V
Rated current	10A	20A
Wire range	26-14AWG	0.2-4mm <sup>2</sup>
Withstanding voltage	AC2000V/1Min	
Torque	0.5Nm(4.4Lb-In.)	
Ambient temperature	-30°C~+120°C	
Strip length	5-6mm	
Pitch	7.5mm(.295")	
Poles	2P,3P-24P	
Housing	PBT,UL94V-0	
Screws	M3,steel,Cr <sup>3+</sup> Zn plated	
Contact	Brass,Tin plated	
Cage	Stainless steel	

### HOW TO ORDER:

ULO - TB<sub>XX</sub> - XX...X - XX P - X X X 0A

1                      2                      3                      4                      5                      6                      7                      8

- Company name. ULO      2      Model.
- Material code. Any letters and (or) digits for factory material code.
- Number of poles. Two digits from 02 to 24.
- Colour of housing. One digit from 1 to 9.  
1. Grey; 2. Blue; 3. Black; 4. Green; 5. Orange; 6. Red; 7. Transparent; 8. Yellow; 9. White.
- Screw head type. One digit 0 or 1.      0. Slot screw; 1. Cross screw.
- Screw clamping type. One digit 0 or 1.      0. Screw down; 1. Screw up.
- Brass cage. '0A' Normal brass cage product.