
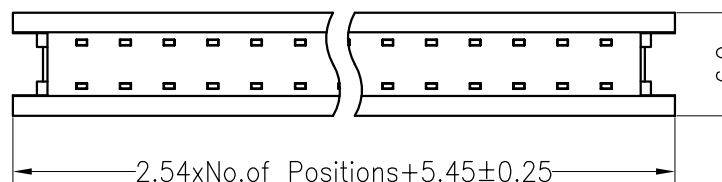

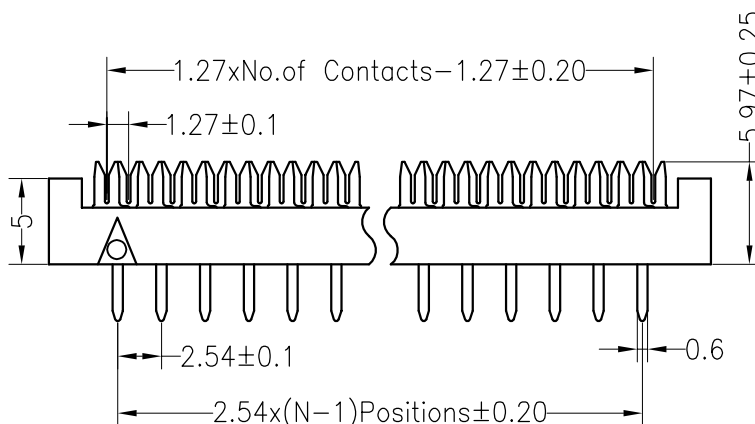

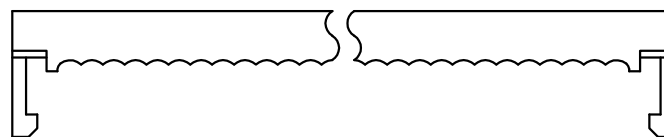


HSF RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass/Phosphor Bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

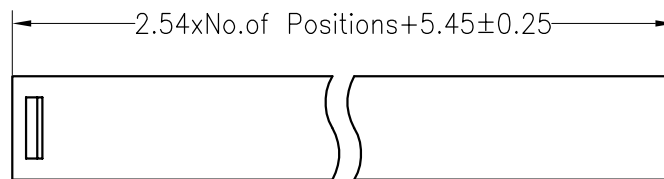

Ordering Information

5410 XX X XX X 01

No.of Pins 06~64P	Contact Material B=Brass P=Phosphor Bronze	Contact Plating G0:Gold Flash G1:3U"Gold G2:5U"Gold G3:10U"Gold G4:15U"Gold G5:30U"Gold S0:Gold Flash/Ni	Color Type B=Black G=Grey
----------------------	--	---	---------------------------------

OPERATION		DRAW	yiyusheng	19.01.15	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

		PART NO.	5410XXXXXX01
		TITLE:	2.54 DIP NPin two type

A0	2019.01.15	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE

