




SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Or Tin Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

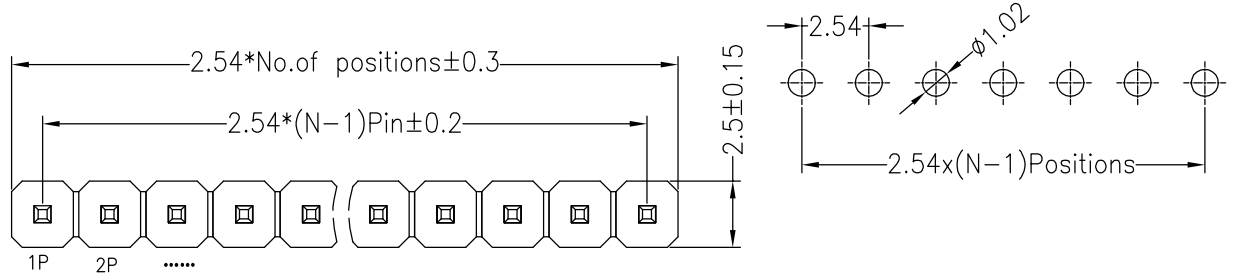

Ordering Information

1225 11 XX X N XX S XXX X 0X

- No.of Pins Per Row 1~40P
- Insulator Material Option
 A=BK-PBT
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
- Contact Plating
 G0:Gold Flash
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 S0:Gold Flash/Tin
 SN:Tin
- Pin Length
- Packing
 0=PE Bag
 A=Tray
 T=Tube
 P=Tube+Cap
 R=Reel+Cap

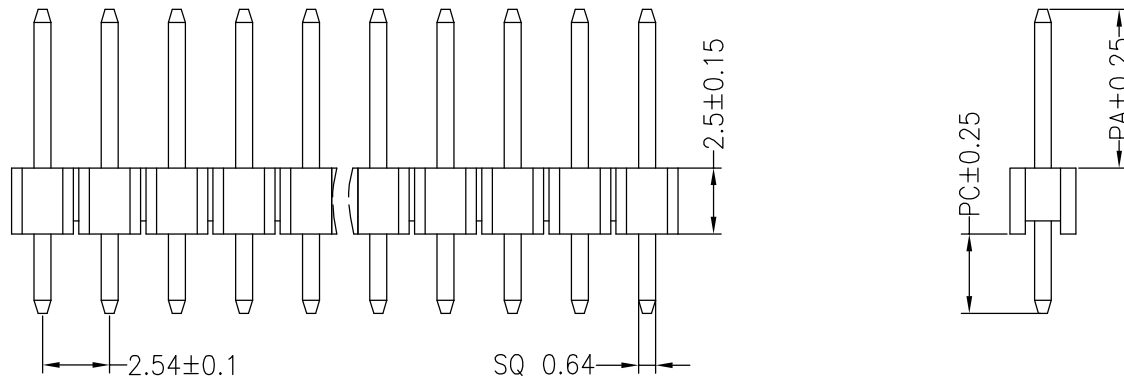

Dimension antitheses list			
ITEM	PA	PC	L
Standard	6.00	3.00	11.50

				OPERATION		DRAW	yiyusheng	19.01.01	SCALE	FIT			
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.			122511XXXXXXSXXXXX0X
				X.XXX	±0.10				SHEET	1/1			TITLE:
A0	2019.01.01	NEW DRAWING		Angle	±3°	APPROVE							
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL								