





SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

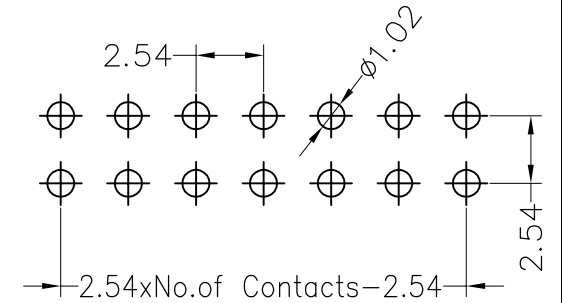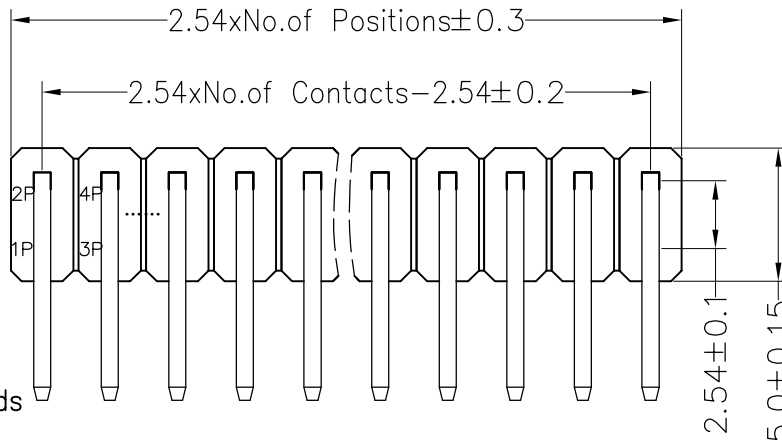

Ordering Information

1225 12 XX X N XX R XXX X 02

- No.of Pins Per Row: 1x40, 2x40, 3x40, 1--40, 2--80, 3--120
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Contact Plating: G0:Gold Flash, G1:1.5U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, S0:Gold Flash/Tin, SN:Tin
- Pin Length
- Packing: O=PE Bag, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

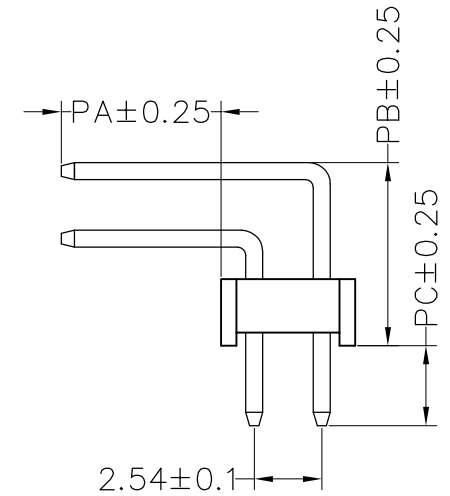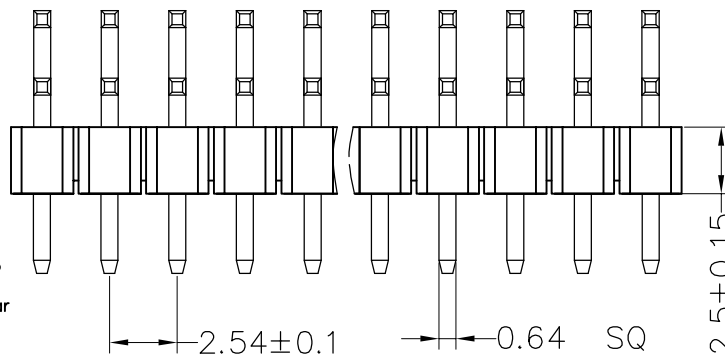

| Dimension antitheses list | | | | | |
|---------------------------|------|------|------|-------|-------|
| ITEM | PA | PC | PB | L短 | L长 |
| Standard | 6.00 | 3.00 | 6.90 | 13.80 | 18.80 |

| | | | | | | |
|-----------|-------|---------|-----------|----------|-------|-----|
| OPERATION | | DRAW | YiYuSheng | 12.04.11 | SCALE | FIT |
| X.X | ±0.30 | | | | UNIT | mm |
| X.XX | ±0.20 | CHECK | | | SIZE | A4 |
| X.XXX | ±0.10 | | | | SHEET | 1/1 |
| Angle | ±3° | APPROVE | | | PROJ. | ☛ |
| DIM | TOL | | | | | |

starfields

PART NO. 122512XXXNXXRXXX02

TITLE: 2.54mm PH H2.5 Dual Row 90°反弯

| | | | |
|-----|------------|--------------------------|--------|
| A0 | 2012.04.11 | NEW DRAWING | |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |