





**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au Or Tin Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)



Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

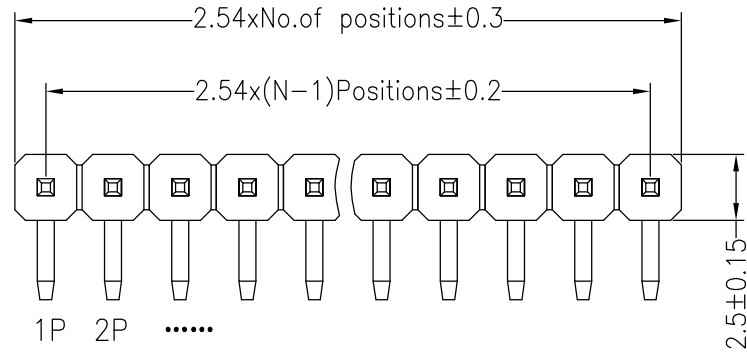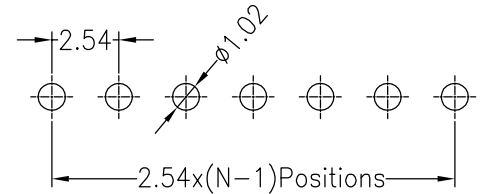

**Ordering Information**

**1225 11 XX X N XX R XXX X 01**

- No.of Pins Per Row  
1x40  
1--40
- Insulator Material Option  
A=BK-PBT  
C=BK-PA6T  
D=BK-PA46  
E=BK-PA9T  
F=BK-LCP
- Contact Plating  
G0:Gold Flash  
G1:1U" Gold  
G2:1.5U" Gold  
G3:2U" Gold  
G4:3U" Gold  
G5:5U" Gold  
G6:10U" Gold  
G7:15U" Gold  
S0:Gold Flash/Tin  
SN:Tin
- Pin Length
- Packing  
O=PE Bag  
A=Tray  
T=Tube  
P=Tube+Cap  
R=Reel+Cap  
M=Reel+Mylar

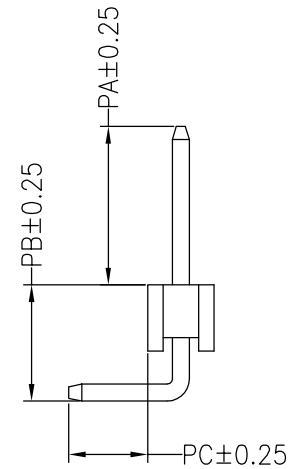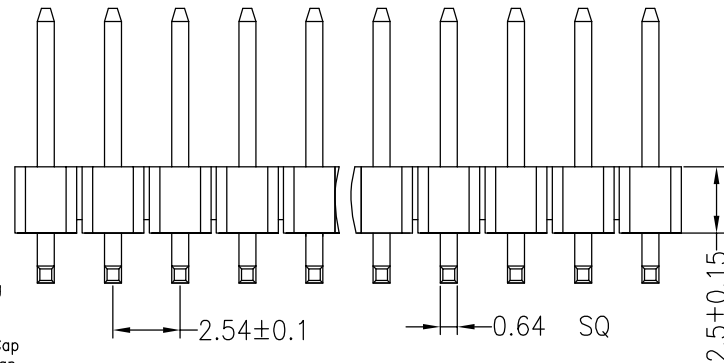

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	6.00	4.40	3.00	13.80

OPERATION		DRAW	OuYangHui	16.08.08	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10		APPROVE			
Angle	±3°	SHEET				1/1
DIM	TOL		PROJ.			1/1



PART NO. 122511XXXXRXXXX01  
 TITLE: 2.54mm Pin Header 2.5mm Single 90°正弯

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2016.08.08	NEW DRAWING	