





SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

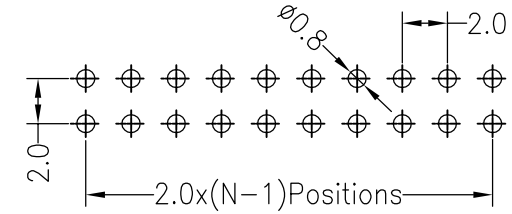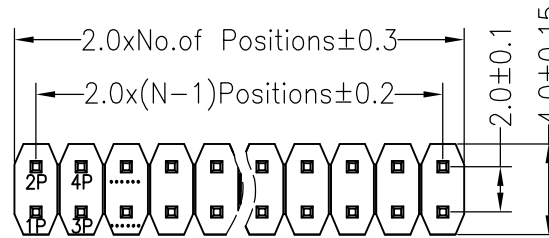

Ordering Information

1320 12 XX X N XX S XXX X 01

- No.of Pins: 2x1~2x40
- Insulator Material Option: A=BK-PBT, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
- Contact Plating: G0:Gold Flash, G1:1U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, G6:10U" Gold, G7:15U" Gold, S0:Gold Flash/Tin, SN:Tin
- Pin Length
- Packing: A=Tray, T=Tube, O=Pe, R=Tape&Reel, P=Tube+Cap

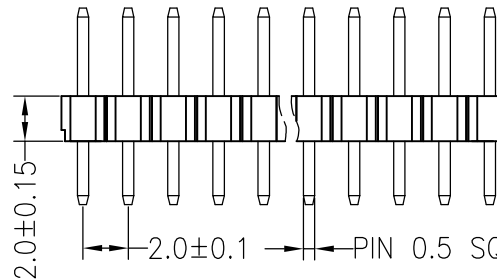

Dimension antitheses list			
ITEM	PA	PC	L
Standard	3.90	2.80	8.70

OPERATION		DRAW	BEN	19.09.17	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

		PART NO.	132012XXXNXXSXXX01
		TITLE:	2.0PH 2xNpin H2.0mm 180°

A0	2019.09.17	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE