


HSF RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)



注:带有序号为重点管控尺寸




Ordering Information

3810 65 01 C XX X 01

Plastics Height 65=6.5mm
 No.of Pins 01=Sing Type
 Contact Plating
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 N0:1U" Gold/Ni
 NI:Ni
 Color Type
 B=Black
 U=Blue
 R=Red
 W=White
 Y=Yellow

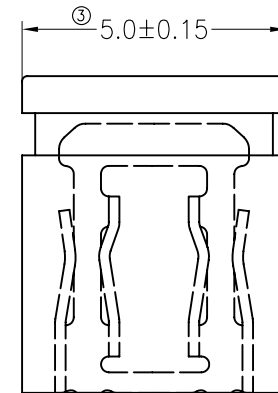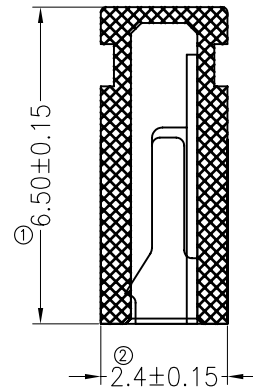

				OPERATION		DRAW	YiYuSheng	12.04.18	SCALE	FIT				
				X.X	±0.30				UNIT	mm				
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.			38106501CXXX01	
A0				2012.04.18	NEW DRAWING			SHEET	1/1	TITLE:			2.54 Mini Jumper 1*2Pin Close Type	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE	PROJ.						