







SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

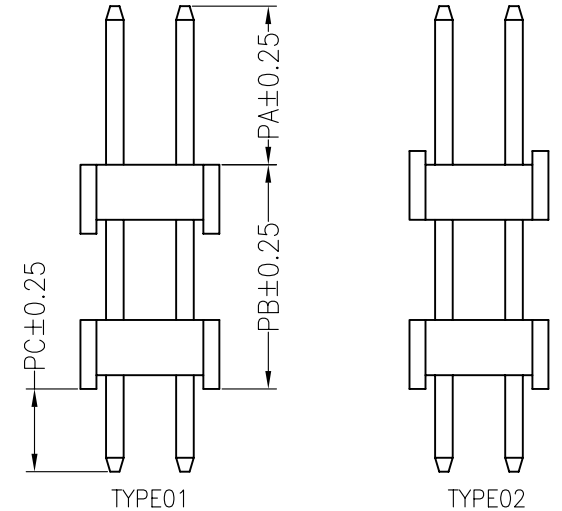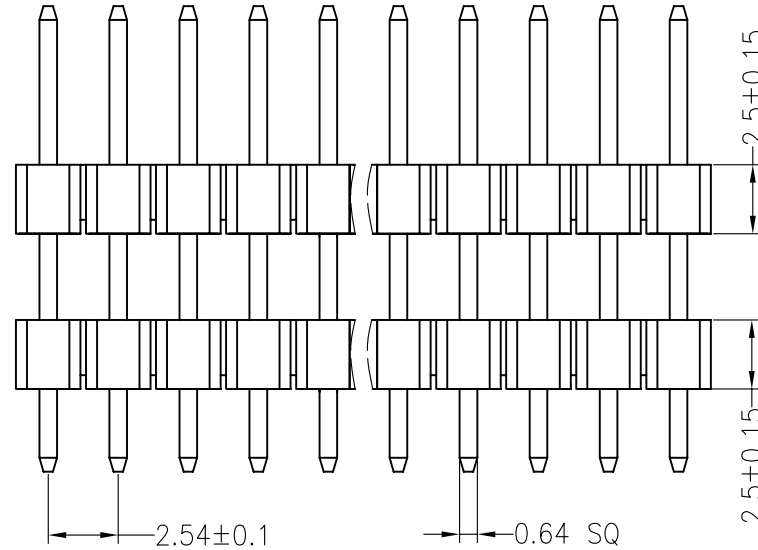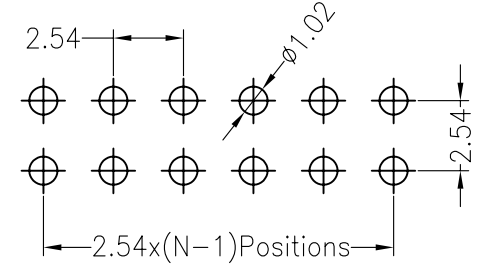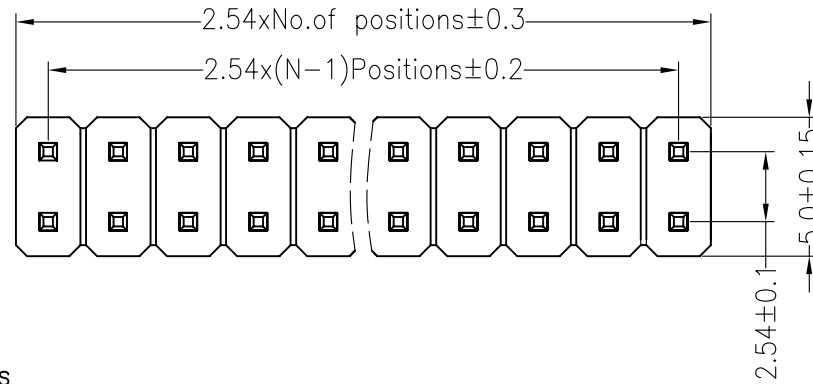

Ordering Information

1225- 22 XX X N XX S XXX X0X(1,2)

- No.of Pins Per Row 2x40 4--80
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
- Contact Plating: G0:Gold Flash, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold
- Pin Length: S0:Gold Flash/Tin, SN:Tin
- Packing: 0=PE Bag, A=Tray, T=Tube

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	6.00	5.00	3.00	14.0
Alternate				

starfields

PART NO. 122522XXXXXXSXXX0X(1,2)

TITLE: 2.54PH Dual Row Double Plastic 180° H=2.5

		OPERATION		DRAW	YiYuSheng	12.04.18	SCALE	FIT
		X.X	±0.30					
		X.XX	±0.20	CHECK			SIZE	A4
A0	2012.04.18	NEW DRAWING					SHEET	1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE			PROJ.	