

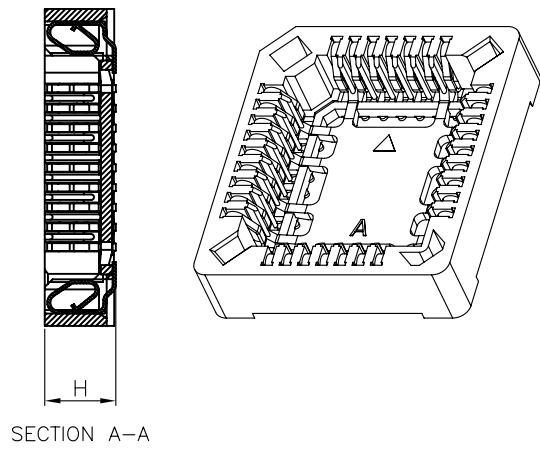


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	DMJ 07/18/07'		

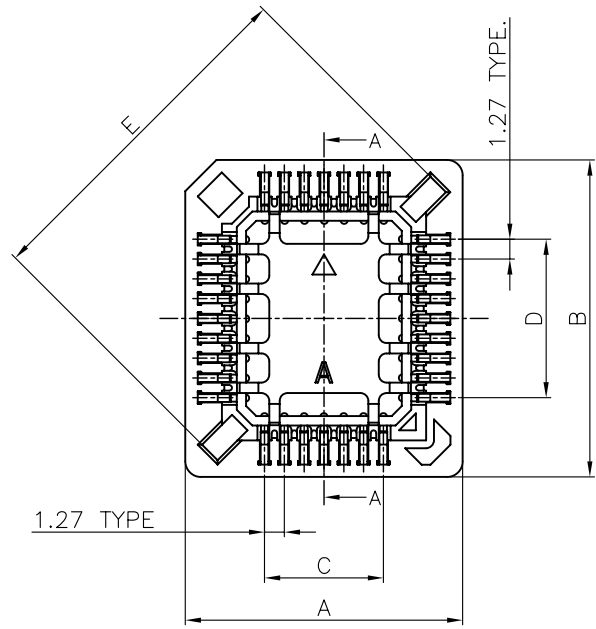

- NOTES:
- MATERIAL:
    - INSULATOR:THERMOPLASTIC,PPS GLASS FIRBER FILLED(UL 94V-0).
    - CONTACT: PHOSPHOR BRONZE.
  - SPECIFICATION:
    - STORAGE TEMPERATURE:-20-70°C.
    - OPERATING TEMPERATURE:0-85°C.
    - CONTACT RESISTANCE:20mΩ max.
    - INSULATION RESISTANCE:1000MΩ min.
    - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
  - PART NUMBER: DS1032 SMT SERIES.
  - PRODUCT NUMBER CODE:  
DS1032- X X X X X X X

- PACKING
- A: TUBE
- R: TAPE ON REEL
- PROFILE HEIGHT(DIM H)
- L: 4.6mm
- 1: 3.81mm
- CONTACT PLATING
- T1: Tin.
- HOUSING COLOR
- K: BLACK
- N: BROWN
- MOUNTING TYPE
- S: SMT
- HOUSING MATERIAL
- S: PPS
- No.OF CONTACTS
- 20 28 32 44
- 52 68 84

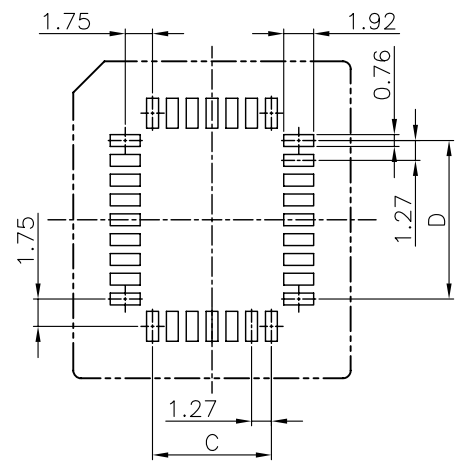

RECOMMEND PCB LAYOUT  
TOLERANCE=±0.05

Dimension

Position	A±0.2	B±0.4	C±0.2	D±0.2	E±0.2
20	15.24	15.24	5.08	5.08	16.70
28	17.78	17.78	7.62	7.62	20.30
32	17.78	20.32	7.62	10.16	22.50
44	22.86	22.86	12.70	12.70	27.50
52	25.40	25.40	15.24	15.24	31.10
68	30.82	30.82	20.32	20.32	38.30
84	35.90	35.90	25.40	25.40	45.50

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	PLCC SOCKET SMT TYPE		
X. ±0.60	X. ±5°	UNITS	mm	SHEET	A4		
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES	DS1032 SERIES		
.XX ±0.25	.XX ±2°	晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>					
DRAWING TYPE	CUSTOMER						
SCALE	1:1						SHEET
DRAWING NO.	C-DS1032-32XXXSXXXX						