

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/27/05'		
B	增加螺丝类型 D	L L 06/06/06'		

NOTES:










1. PRODUCTS PERFORMANCE:

- 1.0 VOLTAGE RATING: 250V AC.
- 1.1 CONTACT CURRENT RATING: 1.5A MAX. PER PIN.
- 1.2 CONTACT RESISTANCE: 20mΩ MAX.
- 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
- 1.4 INSULATION RESISTANCE: 1000MΩ MIN.
- 1.5 TEMPERATURE RANGE: -45°C~+105°C.

2. PRODUCT NUMBER CODE:

DS1038 - X X X X X X X

- BOARD LOCK DIM. F
4: 4.00mm
7: 3.70mm
- SCREW TYPE
A: WITH SCREW TYPE
B: WITH RIVET TYPE
C: RIVET TYPE WITH FIXED SCREWS
D: RIVET TYPE WITH SCREWS IN BULK PACKAGE
- CONTACT PLATING
Si: SELECTIVE GOLD FLASH
8: FULL GOLD FLASH
- SHELL PLATING
N: Nickel
T: Tin
- COLOR OF HOUSING
B: BLACK
U: BLUE
C: BLUE(PC99)
- CONNECTOR TYPE
M: MALE
F: FEMALE
- No. OF CONTACTS
15: 15pos.
44: 44pos.
26: 26pos.
62: 62pos.

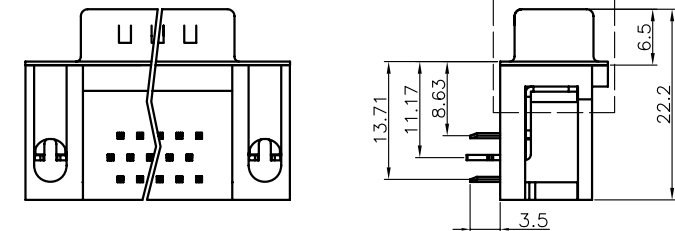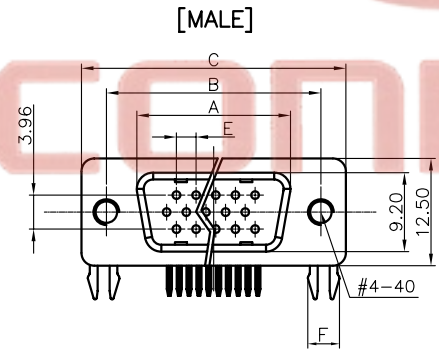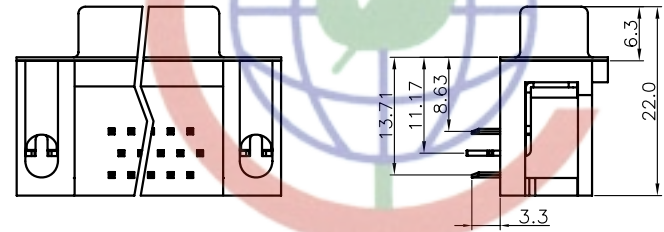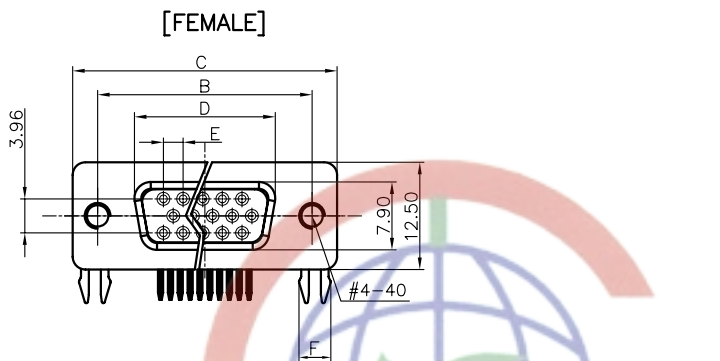

RECOMMEND PCB LAYOUT(TOLERANCE ±0.05)
(VIEW FROM TOP SIDE)

Dimension					
Position	A±0.2	B±0.2	C±0.3	D	E
15	17.90	24.99	30.84	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.14

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60 .X ±0.38 .XX ±0.25	X. ±5° .X ±3° .XX ±2°	UNITS mm	D-SUB H.D RIGHT ANGLE TYPE
DRAWING TYPE	CUSTOMER	SHEET SIZE A4	SERIES DS1038 SERIES
SCALE 1:1	SHEET 1 OF 1	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD	
DRAWING NO. C-DS1038-XXXXXXX			

Tel: 86-574-6350819
Fax: 86-574-63510817

Http://www.connfly.com.cn
Add: West ...
CONNFLY CONNFLY ELECTRONIC CO. LTD