
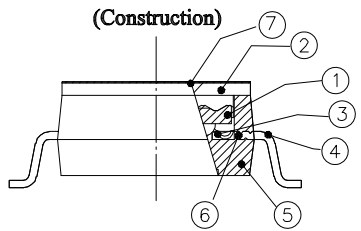

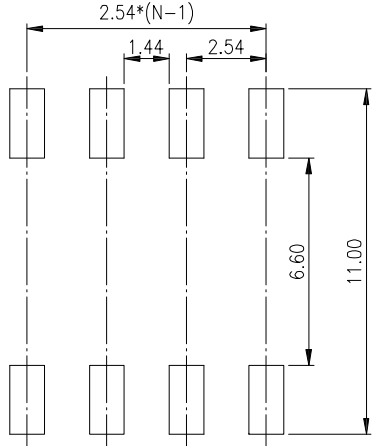

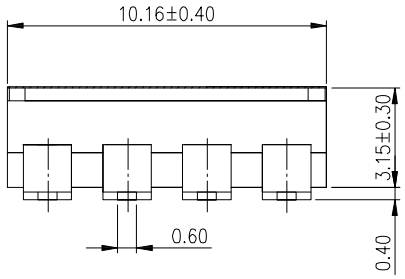
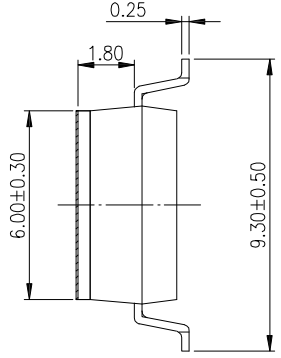


PRODUCT NO. DTSF-04
RoHS COMPLIANT

NOTES :
 1.Specification:
 1>.Operating force:1000gf Max
 2>.Operating Temperature: -40° to+85°
 3>.Storage Temperature: -40° to+85°
 4>.Mechanical Life: 3000cycles minimum
 5>.Electrical Life:2000cycles 25mA 24VDC
 2. PLATING:
 GOLD FLASH 1u"(min.) SOLDER TAIL,
 3u" GOLD PLATING ON THE CONTACT AREA,
 WITH 50u" NICKEL UNDERPLATING OVERALL.

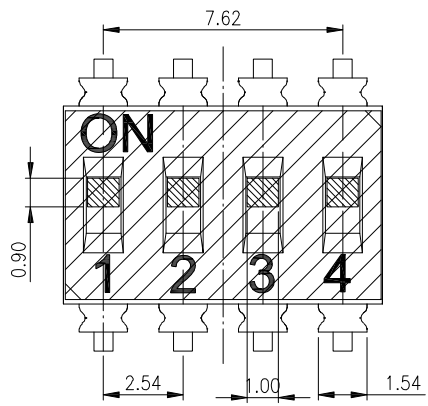

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	Wenzhou Wanda Electronics Co.,Ltd
				LINER	ANGLES		
①	Actuator	PA46 UL94 V0	White	.0 ± 0.25	0. ± 2'	PROJECTION	TITLE
②	Cover	PPS UL94 V0	Black	.00 ± 0.15	.0 ± 1'		BY DTSF SERIES PITCH 2.54mm
③	Movable	Copper Alloy	3u"Gold	.000± 0.10	.00± 0.5'	2012/04/12	PRODUCT FAMILY DTSF SERIES
④	Terminal	Brass	1u"Gold				PRAT NO. DTSF-04
⑤	Base	PPS UL94 V0	Black				FILE NO. DTSF-04-A
⑥	Terminal Contact	Brass	3u"Gold				SIZE A4
⑦	Mylar	UL94 V0	0.05mm				UNIT mm
							SCALE 2 : 1
							SHEET 1 OF 1
							REV. A

1 | 2 | 3 | 4 | 5 | 6

A

B

C

D

A

B

C

D

1 | 2 | 3 | 4 | 5 | 6