



- NOTE:** 1. ALL DIMENSIONS ARE IN MILLIMETERS.
 2. GENERAL TOLERANCE:±0.2mm
 3. MATERIAL: Δ BASE:UL94V-0 PBT Thermoplastic(Black)
 Δ COVER:UL94V-0 PBT Thermoplastic(Red.Black.Blue)
 Δ ACTUATORS:UL94V-0 PBT Thermoplastic(White)
 Δ CONTACT PLATING:Gold plating over nickel
 Δ PITTING MATERIAL:Epoxy

PROD. NO.	NO. OF POS.	DIM. A	DIM. B
DS-02	2	6.64	2.54
DS-03	3	9.18	5.08
DS-04	4	11.72	7.62
DS-05	5	14.26	10.16
DS-06	6	16.80	12.70
DS-07	7	19.34	15.24
DS-08	8	21.88	17.78
DS-09	9	24.42	20.32
DS-10	10	26.96	22.86
DS-12	12	32.04	27.94

P.C.B. LAYOUT

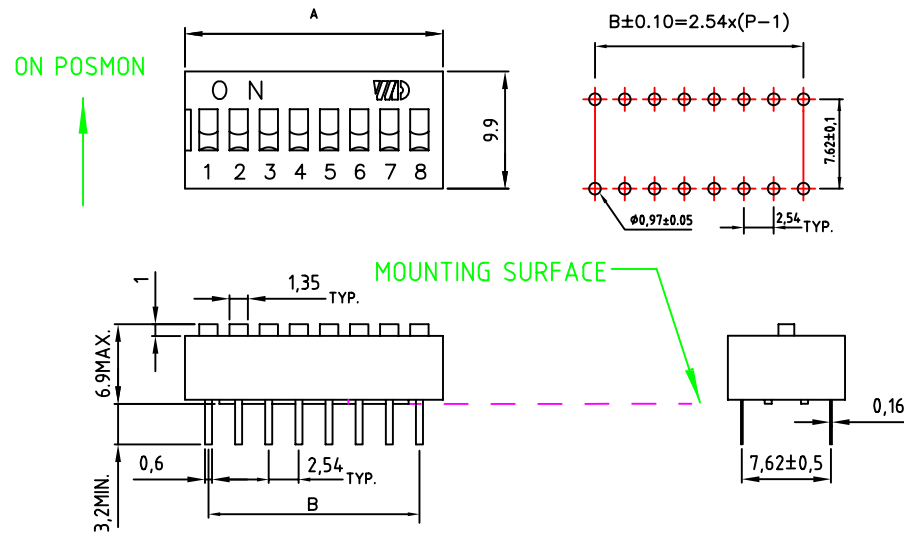

SCHEMATIC(TYP.)

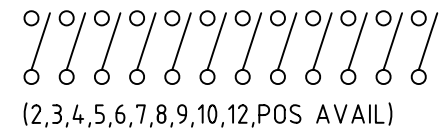

Δ ELECTRICAL

Electrical:2000 operations per switch-
 24 VDC,25mA.
 Non-Switching Rating:100mA,50VDC.
 Switching Rating:25mA,24VDC.
 Contact Resistance:50mΩ max. at initial.

Δ MECHANICAL

Mechanical life: 2000 operations per swith.
 Stroke: 2.0mm.
 Operation Temp: -20° to 70°.
 Storage Temp: -40 ° to 85°.

万达电子有限公司

产品名称	DS系列	版本		比例	FIT
产品编号		绘图		单位	mm
未标明公差尺寸	±0.20	审核		日期	
		批准		日期	

标记	更改事由	签名	日期
△			
△			