




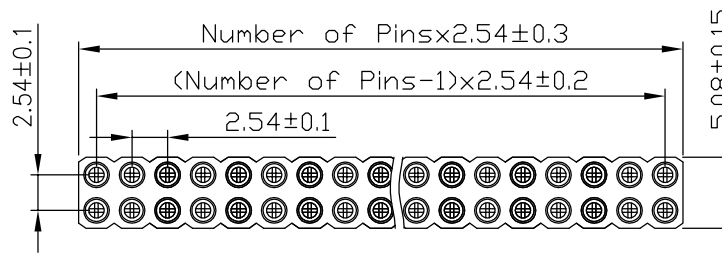


Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
 Flammability: UL 94V-O
 Sleeve: Brass
 Contact clip(6 finger): Beryllium copper(C17200)
 Accepted pin: $\varnothing 0.70$ to 0.90mm , 0.635mm
 Forces: (polished steel gauge $\varnothing 0.76\text{mm}$)
 --Insertion 2 N typ
 --Withdrawal 1 N typ
 Mechanical life: min 500 cycles
 Rated current: 3A
 Contact resistance: max 10m Ω
 Dielectric resistance: Min 1000V RMS
 Max.Processing Temp: 230°C for 30–60 seconds
 (260°C for 10 seconds)

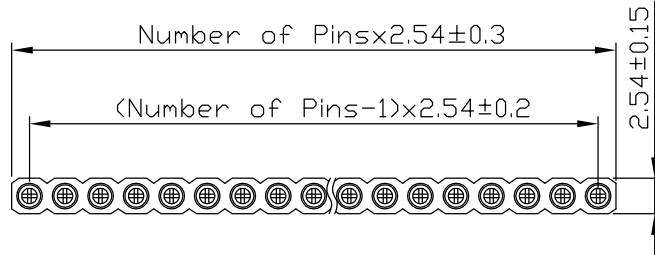

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

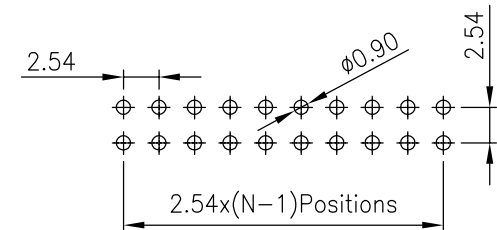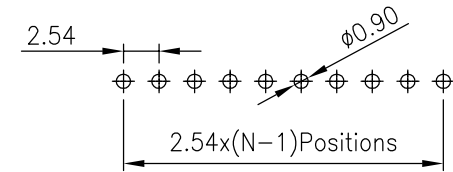

Ordering Information




3620 70 X XX S XX 100 01

Insulator Type Code
1: Single row
2: Double row

No. of Pins
1–40 Pin

Contact Plating
G0: Gold Flash
S0: Gold Flash/Tin
S4: 5 μ " Gold/Tin
S5: 10 μ " Gold/Tin
S6: 30 μ " Gold/Tin

Length
100 = 10.0mm

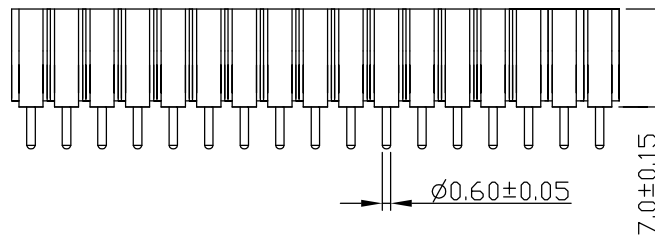

OPERATION		DRAW	yiyusheng	18.07.04	SCALE	FIT
X.X	± 0.30					
X.XX	± 0.20	CHECK			UNIT	mm
X.XXX	± 0.10					
Angle	$\pm 3^\circ$	APPROVE			SHEET	1/1
DIM	TOL					

		PART NO.	362070XXXSXX10001
		TITLE:	2.54X7.0圆孔座 L=10.0大孔针

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2018.07.04	NEW DRAWING	