





# HSF RoHS

## SPECIFICATIONS

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze  
 Contact Plating:Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

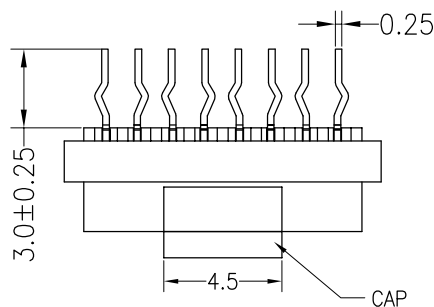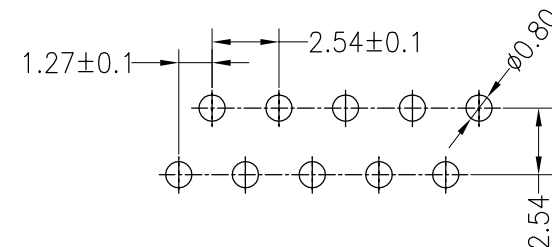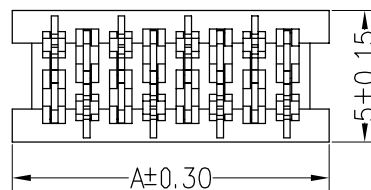


PINS	A	B
4	6.98	3.81
6	9.52	6.35
8	12.06	8.89
10	14.60	11.43
12	17.14	13.97
14	19.68	16.51
16	22.22	19.05
18	24.76	21.59
20	27.30	24.13
22	29.84	26.67
24	32.38	29.21
26	34.92	31.75

## Ordering Information

4000 XX F S SN X N X 01

No.of Pins: 04~26P  
 Contact Plating: S0:Gold Flash/Tin, SN:Tin  
 Insulator Material Option: A=BK-PBT, D=BK-PA46  
 Packing: T=Tube, P=Tube+Cap, R=Reel+Cap

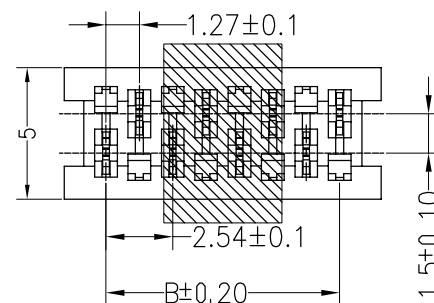

OPERATION		DRAW	yiyusheng	19.04.11
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

**starfields**

PART NO. 4000XXFSSNXNX01

TITLE: MICRO MATCH FEMALE-DIP TYPE

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.04.11	NEW DRAWING	