


# HSF RoHS

## SPECIFICATIONS

Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max at DC 100mA  
 Withstand Voltage:500V AC/DC 50Hz For 1minute  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c  
 Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA46/PBT

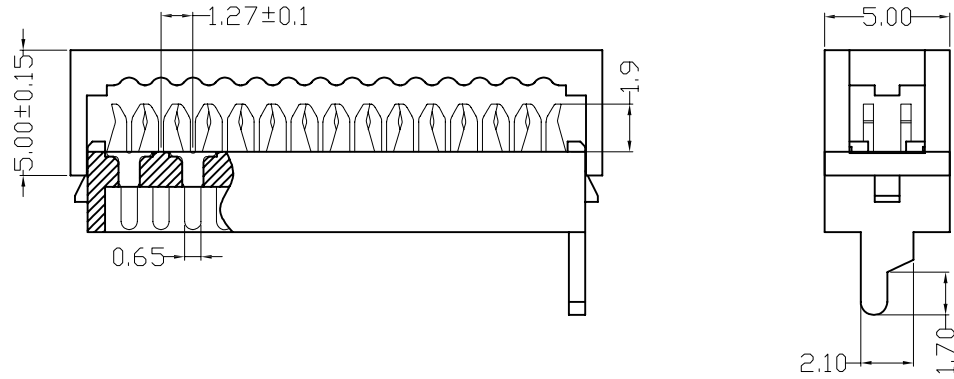


## Ordering Information

4000 XX M I SN X N T 02



No.of Pins  
4-26P

Contact Plating  
 G0:Gold Flash  
 G2:1.5U" Gold  
 G3:2U" Gold  
 G4:3U" Gold  
 G5:5U" Gold  
 S0:Gold Flash/Tin  
 SN:Tin

MATERIAL  
 A=PBT  
 D=PA46

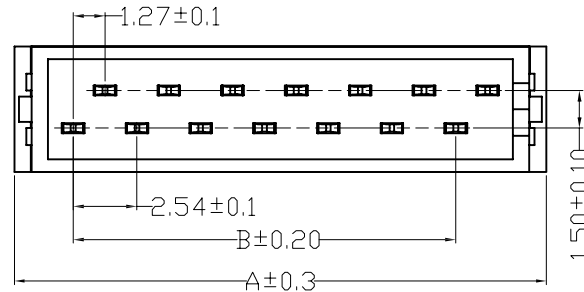

PINS	A	B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
22	31.31	25.4
24	33.85	27.94
26	36.39	30.48

REV		DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	WZG	14.07.10	SCALE	FIT			
A0		2012.03.28	NEW DRAWING		X.X	±0.30				UNIT	mm		PART NO.	4000XXFIXXNTO2
					X.XX	±0.20	CHECK			SIZE	A4			
					X.XXX	±0.10				SHEET	1/1		TITLE:	1.27红色IDC公座线端 短脚长耳无缺口
					Angle	±3°	APPROVE			PROJ.				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL									