
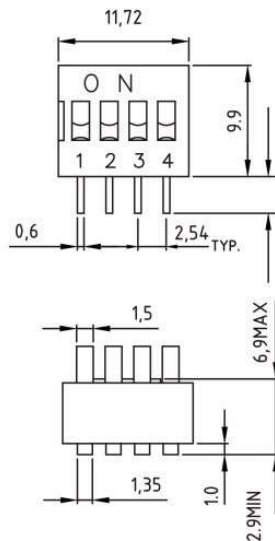

■ SPECIFICATIONS

Mechanical life	2000 operations per switch
Operation Force	≤9.8N max.
Stroke	2.0mm
Operation Temp	-20°C to 70°C
Electrical life	2000 operations per switch-24 VDC, 25mA
Contact Resistance	50mΩ max. at initial
Non-Switching Rating	100mA, 50VDC
Switching Rating	25mA, 24VDC
Circuit	Single pole single throw

■ DIMENSIONS

P.C.B. LAYOUT
