


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 09/25/06'		

NOTES:


- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.

3. PRODUCT NUMBER CODE:

DS1077-	X	X	X	X	X	X			
									SCREW DIM. A
									S: Standard(W/O nut)
									1: 5.00
									2: 3.00
									3: 5.20
									4: 4.80
									5: 5.80
									SCREW TYPE
									S: Standard(W/O nut)
									1: CC TYPE
									2: CS TYPE
									3: BR TYPE
									4: BRJ TYPE DIM. DIM C: 3~4
									5: BRJ TYPE DIM. DIM C: 5~6
									6: BRJ TYPE DIM. DIM C: 3~4
									(SCREWS IN BULK PACKAGE)
									SHELL PLATING
									T:FORNT & BACK SHELL TIN
									N:FORNT SHELL NICKEL,BACK SHELL TIN
									CONTACT PLATING
									8: FULL GOLD FLASH
									0: SELECTIVE GOLD FLASH
									HOUSING COLOR
									B:BLACK
									W:WHITE
									U:BLUE
									CONNECTOR TYPE
									M:MALE
									F:FEMALE
									No.OF CONTACTS
									15 26 44 62 78

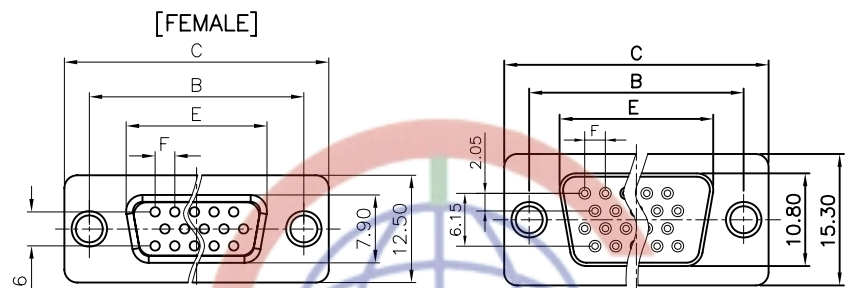

78pin Figure

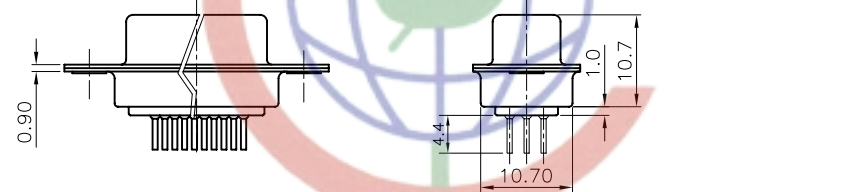


Standard TYPE

CC TYPE


CS TYPE

BR TYPE

BRJ TYPE

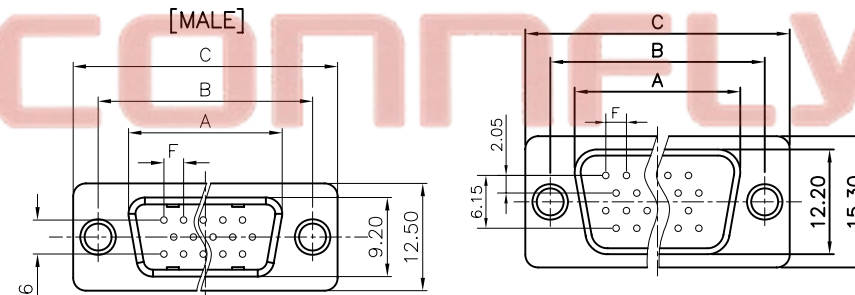


78pin Figure

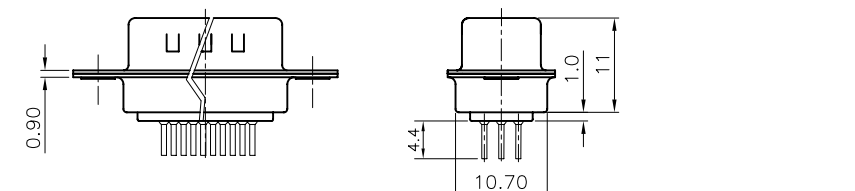

Dimension

Position	A	B	C	E	F
15	17.90	24.99	30.80	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.41
78	54.30	61.00	67.04	52.34	2.41

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	mm	D-SUB H.DIP STRAIGHT TYPE
.X ±0.38	.X ±3°	A4	SERIES DS1077 SERIES
.XX ±0.25	.XX ±2°		
DRAWING TYPE	CUSTOMER	Add: West Gao Road, Wuxi City, Jiangsu Province, China	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1077-XXXXXXX	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD	

Tel: 86-574-63508787
Fax: 86-574-63510817