





ULO-TB23-2KA/5.0, ULO-TB29-2KA/5.08

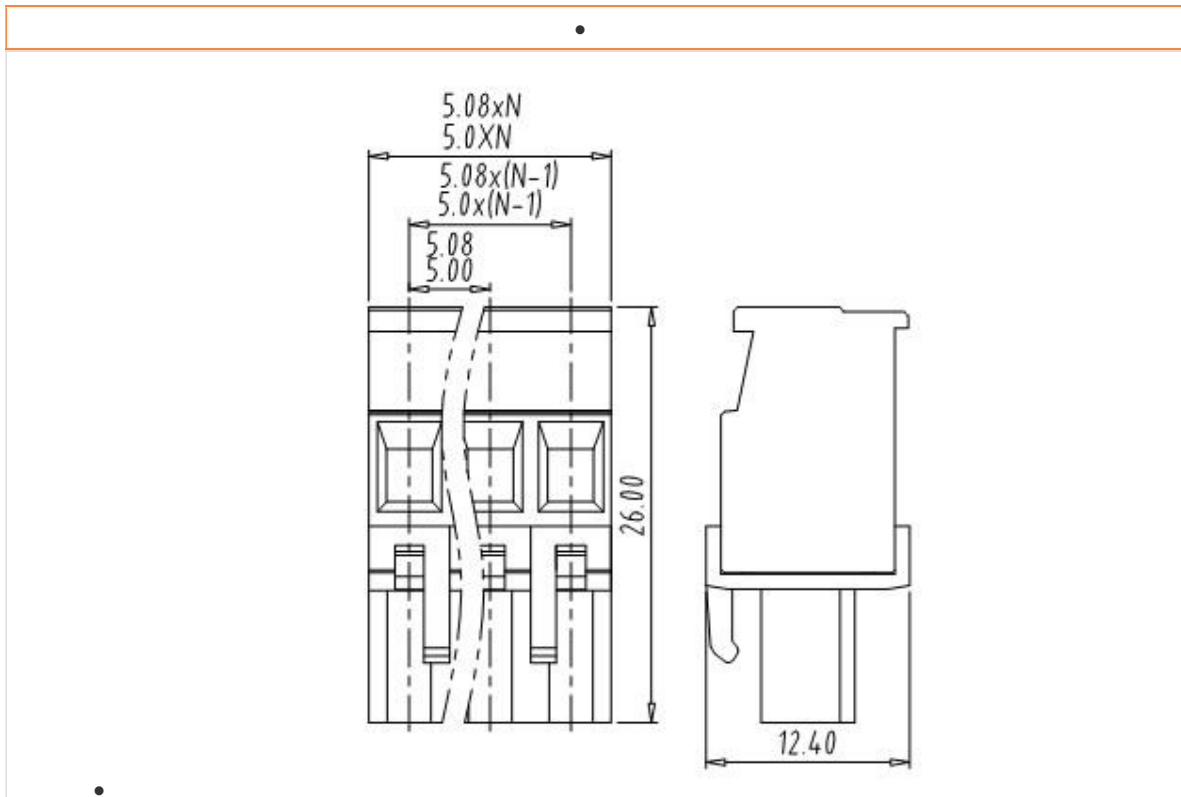

- Part No.:ULO-TB23-2KA/5.0, ULO-TB29-2KA/5.08

Pitch:	5.0mm(.197")/5.08mm(.200")	
Standard		 
Rated voltage	300V	320V
Rated current	16A	20A
Ambient temperature	-40°C~+115°C	
Wire range	28-16AWG	0.2-2.5mm ²
Torque	0.4N.m	
Poles	02P-24P	
Material Message		
Housing	PA66,UL94V-0	
Screws	M2.5,steel,Cr3+ Zn plated	
Contact	Phosphor bronze,Tin Plated	
Cage	Brass,Ni plated	