


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	DMJ 07/18/07'	~	LJC 07/17/07'
B	更改料号代码	YCH 08/04/07'	~	

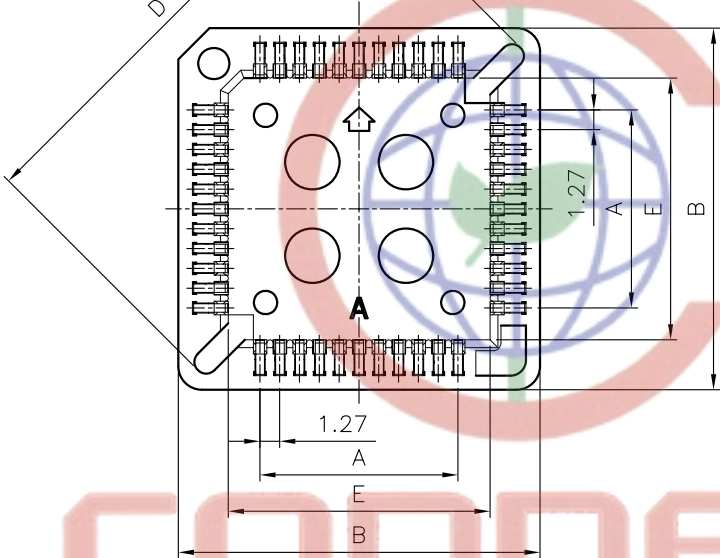



Dimension

Position	A±0.2	B±0.4	C±0.2	D±0.2	E±0.2
20	5.08	15.56	10.16	18.46	9.16
28	7.62	18.10	12.70	22.05	11.70
44	12.70	23.18	17.78	29.24	16.78
52	15.24	25.72	20.32	32.83	19.32
68	20.32	30.80	25.40	40.02	24.40
84	25.40	35.88	30.48	47.20	29.48

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - STORAGE TEMPERATURE:-20-70°C.
 - OPERATING TEMPERATURE:0-85°C.
 - CONTACT RESISTANCE:20mΩ max.
 - INSULATION RESISTANCE:1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
- PART NUMBER: DS1032
- PRODUCT NUMBER CODE: DS1032- X X X X X X

- PACKING
- A: TUBE
- CONTACT PLATING
- T1: Tin.
- HOUSING COLOR
- K: BLACK
- N: BROWN
- MOUNTING TYPE
- D: V/T DIP
- HOUSING MATERIAL
- S: PPS
- No.OF CONTACTS
- 20 28 44
- 52 68 84

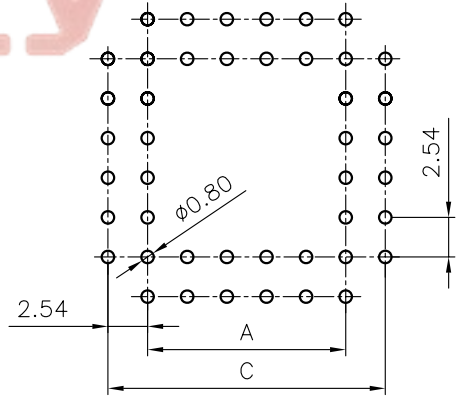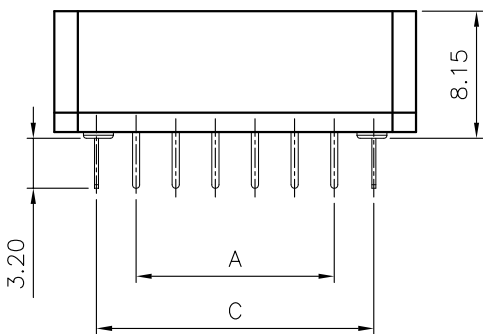

RECOMMEND PCB(V/T TYPE) LAYOUT
TOLERANCE=±0.05





Tel: 86-574-63508787
Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	PLCC 20/28/52/68/84pin DIP SOCKET	
X.	±0.60	X.	±5'	UNITS	mm		
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1032 SERIES
.XX	±0.25	.XX	±2'				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1					
DRAWING NO.		C-DS1032-XXXXXX					

CONNFLY

E-mail: connfly@connfly.com.cn
<http://www.connfly.com.cn>
 Add: West Gaojin Town Cixi Ningbo China
 P.C.:315321

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	DMJ 07/18/07'		LJC 07/17/07'
B	更改料号代码	YCH 08/04/07'		

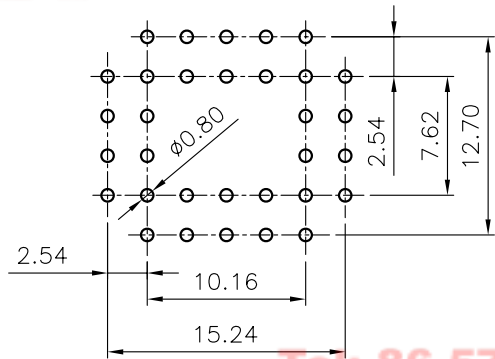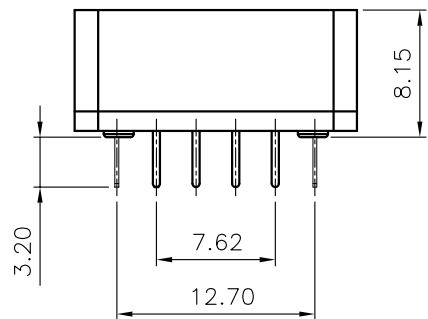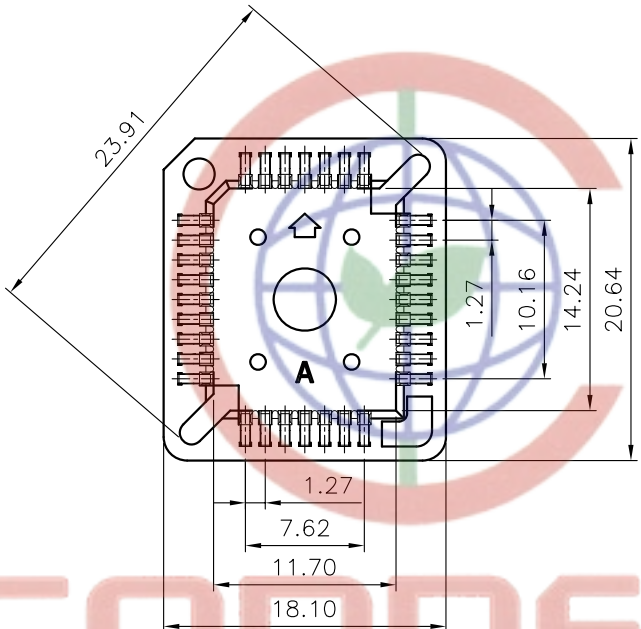

RECOMMEND PCB(V/T TYPE) LAYOUT
TOLERANCE=±0.05

- NOTES:
- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
 - SPECIFICATION
 - STORAGE TEMPERATURE:-20-70°C.
 - OPERATING TEMPERATURE:0-85°C.
 - CONTACT RESISTANCE:20mΩ max.
 - INSULATION RESISTANCE:1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
 - PART NUMBER: DS1032
 - PRODUCT NUMBER CODE:
DS1032- X X X X X X
 - X X X X X X — PACKING
 - A: TUBE
 - CONTACT PLATING
 - T1: Tin.
 - HOUSING COLOR
 - K: BLACK
 - N: BROWN
 - MOUNTING TYPE
 - D: V/T DIP
 - HOUSING MATERIAL
 - S: PPS
 - No.OF CONTACTS
 - 32

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PLCC 32pin DIP SOCKET
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1032 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1032-32XXXX						

FOR 32pin ONLY

Tel: 86-574-63508787
Fax: 86-574-63510817